


ALL-IN-ONE Solar&Lithium Battery Energy System

Main composition

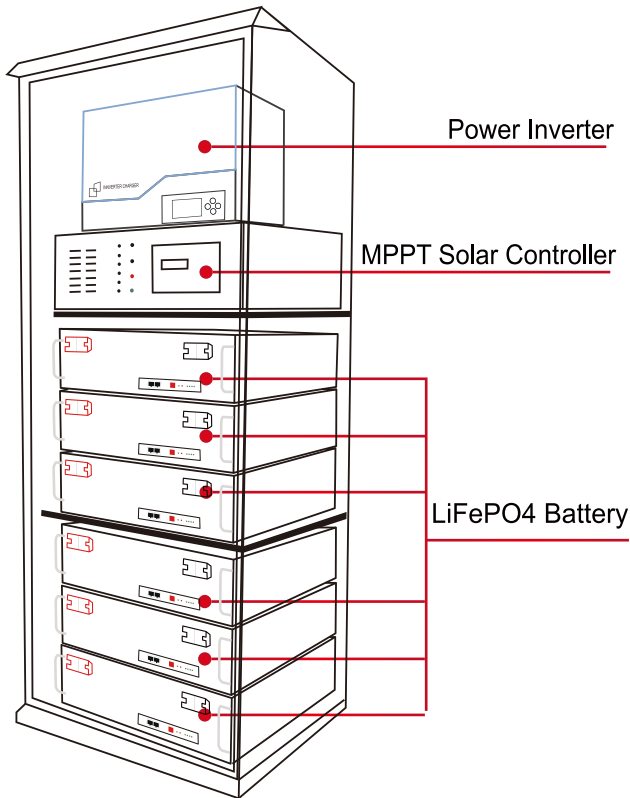

LiFePO4 Battery, Number of cycles, 2000 times (100% DOD) / 4000 times (80% DOD) / 7000 times (50% DOD)

The All-in-one system is composed of inverter, MPPT solar controller, LiFePO4 battery, BMS protection system, cabinet and other auxiliary components.

Product Application



energy storage applications including industrial parks, parks, communication base stations, islands, military camp, port power, subway, ETC gate and other areas in lack of power as a backup power supply

Product Feature

- Efficient
The priority supply sequence of Battery(DC) and Grid power(AC) can be set;
When the grid breaks down, smooth switch to this power source within 4ms and never cut off;
Built-in lithium battery, capacity from 1.2KWh-48KWh can be configured by the customers;
The system assembly is flexible, simple and diversified
- Smart
APP intelligent control, remote monitoring and control (optional)
Connected to the power grid to realize peak-shaving and valley-filling, and self-use for spontaneous use;
Multiple communication equipment: GPRS, RS485, CAN*2 (for lithium battery), Wifi (optional).
- Reliable
Professional energy management system, three-stage charging function, compatible with different kinds of Lithium iron batteries.
The charging current can be adjusted according to various battery capacity;
Friendly man-machine interface, large LCD screen display;
It has long cycle life, stable power supply and high reliability;
Wide operating temperature range, high and low temperature performance;
IP20/IP65 protection grade is optional.
Small size and light weight;

Advantages



Easy to move



Energy saving



Dust prevention



Tel: 86-010-87227420 Fax: 86-010-85885278
Mobile No.: 13641024477 / 15910870754 <http://www.multifitele.com>
Email: multifit@multifitele.com
Website: <http://www.multifitele.com> Facebook: [multifit@multifitele.com](https://www.facebook.com/multifit@multifitele.com)
Company Address: 503 Building 5 No10 Ronghuanan road, Beijing Economic & Technological development Zone 100176, BeiJing China
Factory address: .6 Keji west road, Hi-Tech Zone Shantou City, GuangDong, China

Model	M-ESS2K	M-ESS3K	M-ESS4K	M-ESS5K	M-ESS8K	M-ESS10K	M-ESS20K
System capacity							
Stored Power	2.4KWh	4.8KWH	4.8KWH	9.6KWH	19.2KWH	24KWH	38.4KWH
Battery Capacity	24V100AH	24V200AH	48V100AH	48V200AH	48V400AH	48V500AH	96V400AH
Rated Output Power	2KW	3KW	4KW	5KW	8KW	10KW	20KW
Inverter Parameters							
DC Voltage	24V	24V	48V	48V	48V	48V	96V
AC Input & Output Voltage	220-240Vac/100-120Vac 50/60Hz Optional						
Output Waveform	Pure Sine Wave						
Recharging Current	10-50A Adjustable						
Distortion	<3%						
Power Factor	1.0						
Switching Time	<4ms						
MPPT Controller (Optional)							
MPPT Voltage	0-150V						
MPPT Recharging Current	24V60A	24V60A	48V80A	48V100A	48V80A*2	48V100A*2	96V100A*2
APP and LCD display							
APP Function	Remote Monitoring And Control Function (Optional)						
LCD Screen	Display inverter/controller/lithium battery data (optional)						
Installation Method:	Floor-standing						
Service life	10 Years						
Net Weight	90kg	120kg	140kg	190kg	300kg	380kg	500kg
Protection Level:	IP20/IP65 Optional						



Remarks: we can also customize it according to your specific requirements (such as battery type, AC outlet types, AC output voltage, inverter, integrated charge controller, or UPS switching function).

Customizable