

# Monocrystalline PV Module MUL-8M-395W-72


Power Output	Power Tolerance	Maximum Efficiency
360-395W	0~+5W	19.9%

- Superior silicon cells, High efficiency solar panel, Most cost-effective and ideal option for power station.
- Excellent encapsulating materials and strict production process to ensure highly resistance against PID (Potential Induced Degradation) of PV module.
- High transparent self-clean tempered glass to increase the light adoption and effectively reduce the power loss which is caused by dust.
- Pass the test for weather resistance in harsh environments (salt mist, ammonia corrosion and sand)
- Reinforced frame with more remarkable loading capacity.
- 1500V highest affordable system voltage to effectively reduce the BOS cost.



## MULTIFIT Offers Long-term Quality Assurance

- 12 years Product Warranty
- 25 years Linear Power Output Warranty
- The attenuation of the power output in the first year  $\leq 2\%$ , the annual average attenuation after the first year  $\leq 0.55\%$

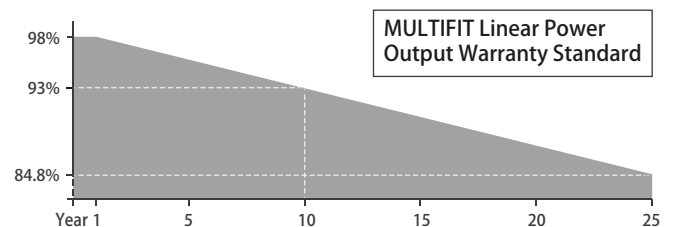

\* More details please read the guarantee letter.

## Product Certification & Management Certification

- IEC61215/IEC61730/IEC61701/IEC62716
- ISO 9001:Quality Management System
- ISO 14001:Environment Management System
- ISO 45001:Occupation Health Safety Management System



